


Form B

HENNEP TOUW (zachte vezels)
met 4 STRENGEN - Quality A
volgens Din 83 325



Code	Ø mm	GEWICHT kg/100 m	BREEKKRACHT KG	CMV WLL
	8	4,7	407 kg	40 kg
	10	7,4	637 kg	63,7 kg
	12	11,1	980 kg	98 kg
	14	14,1	1.250 kg	125 kg
	16	18,5	1.660 kg	166 kg
	18	23,0	2.050 kg	205 kg
	20	28,6	2.530 kg	253 kg
	22	34,6	2.950 kg	295 kg
	24	45,0	3.620 kg	362 kg
	26		4.780 kg	418 kg
	30	64,2	5.620 kg	5.620 kg
	35	92,0	8.500 kg	850 kg
	40	115,0	9.980 kg	998 kg

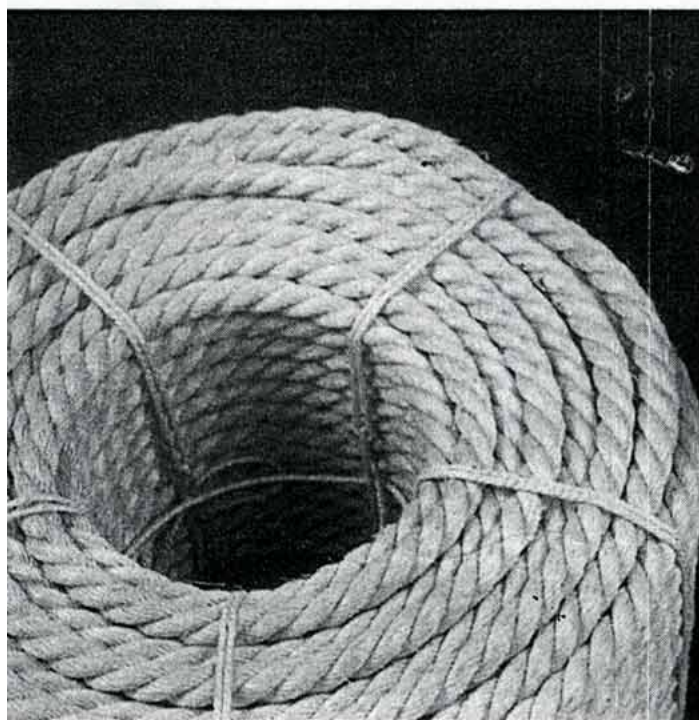

Lengte tot 220 m.

Werklast : 1/10 van de breekkracht.

NYLON TOUWWERK

POLYAMIDE (NYLON)

Ø mm	GEWICHT gr./m.	BREEKKRACHT kg
6	23	750
8	41	1.350
10	65	2.080
12	94	3.000
14	128	4.100
16	166	5.300
18	210	6.700
20	260	8.300
22	315	10.000
24	375	12.000
30	585	17.800

Smeltpunt : 215°C

Density : 1,14

POLYESTER

Ø mm	GEWICHT gr./m.	BREEKKRACHT kg
8	48	1.020
10	76	1.590
12	110	2.270
14	148	3.180
16	195	4.060

Smeltpunt : 250°C

Density : 1,38

PA NYLON TRESSE

Ø mm	GEWICHT gr./m.	BREEKKRACHT kg
1	1	35
1,5	1,4	47
2	2,5	70
2,5	3,7	95
3	5,2	175
3,5	7,2	245
4	10	320
5	17	500
6	21	750
8	40	1.300
10	68	2.000
12	95	2.950



SYNTHETISCH TOUWWERK

PP

SPLIT FILM

POLYPROPYLEEN

Ø mm	GEWICHT gr./m.	BREEKKRACHT kg
6	17	600
8	30	1.060
10	45	1.560
12	65	2.220
14	90	3.050
16	115	3.780
18	148	4.820
20	180	5.800
22	220	6.950
24	260	8.130
26	305	9.400
28	355	10.700
30	405	12.200
36	590	16.900
40	720	20.500

Snelpunt : 165°C

Density : 0,91

PE

POLYETHYLEEN

Ø mm	GEWICHT gr./m.	BREEKKRACHT kg
6	18	400
8	33	700
10	49	1.090
12	72	1.540
14	95	2.090
16	128	2.800
18	161	3.470
20	200	4.280
22	243	5.080
24	295	6.100
26	328	6.940
28	393	8.200
30	460	9.490
36	660	13.460
40	785	16.320

Snelpunt : 135°C

Density : 0,96



BLOKKEN voor TOUW



Ø Touw	10	10	13	16	19	22	26	32
SCHIJF DIAMETER	60	75	90	100	120	130	150	175
met 1 SCHIJF KRACHT GEWICHT KG	75 0.7	100 0.9	150 1.6	250 1.8	500 3.4	500 4.2	1000 5.8	1500 8.5
met 2 SCHIJVEN KRACHT GEWICHT KG	100 1.1	150 1.4	250 2.6	500 3.1	750 5.3	1000 7.1	1500 9.9	2000 14.5
met 3 SCHIJVEN KRACHT GEWICHT KG	150 1.5	250 2	500 3.6	750 4.6	1000 7.3	1500 9.6	2000 13.4	3000 19.5
TOUWSCHIJVEN Ø	65	75	90	100	120	130	150	175

LOSSEN SCHIJVEN in gietijzer

Voor kemp koorden.

Ø MM	60	75	90	100	120	130
Breedte van de groef	11	11	14	17	20	24
Boring	11	12	14	14	19	22
Dikte van de naaf	21	22	25	28	35	40